

**EXC-W62CBL Multi-pixel LED Wall Washer**



Application Environment:  
Indoor  
Outdoor

**Description**

**EXC-W62CBL full color series** are high power outdoor landscape LED wall washer with high strength aluminum alloy housing by EXC-LED. EXC-W62CBL can be used for accent lighting or flood lighting, such as building facade, bridge, stage, etc. Customized lighting fixture length available.

**Features**


- The newest generation technology: DMX512 parallel bus design
- Unique waterproof and breathable design
- Low thermal resistance path heat dissipation design
- Outdoor lightning protection and electrostatic discharge (ESD) protection design
- Projection distance: 1-5m
- 

**Basic Specifications**

Color Range	RGBW, RGB, W(2200K-6500K)
Light Source	18(RGBW), 36(W, RGB, RGBW) pcs LEDs
Working Voltage	DC 24V
Max. Power Consumption	36W(RGBW, RGBW), 72W(white, RGBW )
Control	DMX512, ON/OFF
Segment	1
Grey Scale	8bit, 16bit
Source Life	50,000 h
RDM	Optional
LED chip Brand	Optional(Cree, OSRAM, Lumileds, Epistar, etc...)
Housing	High Strength Aluminum
Cover	Tempered glass
Weight	2.5KG
Working Temperature	-40°C to 60°C


Storage Temperature	-40°C to 70°C
Protection Rating	IP66
Efficiency flux	75LM/W(white), 25LM/W(RGB), 35LM/W(RGBW)
Beam Angle	XP series: 8°、10°、15°、15*30°、30°、60° CREE 5050 RGBW(four in one) /XMLRGBW(four in one): 15°、30°、45°、60°、15*30° and other beam angle available
Host Controller	EXC-5200
Slave Controller	EXC-2905T1
Signal Cable	EXC-LED outdoor special cable
<b>Light Intensity Distribution</b>	

**Light Intensity Chart**

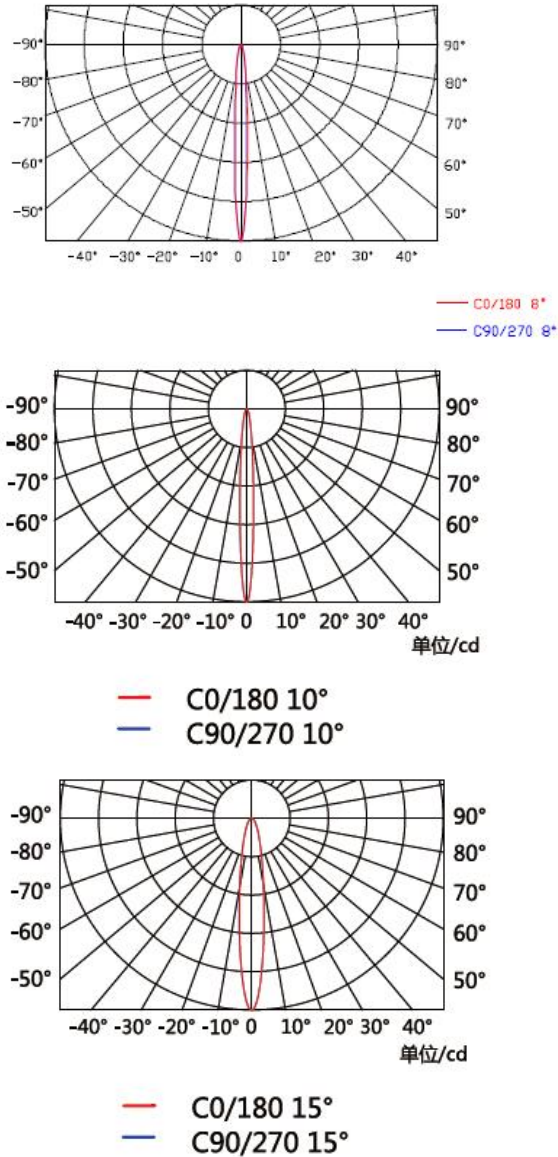



**Physical Dimension**

Unit: mm

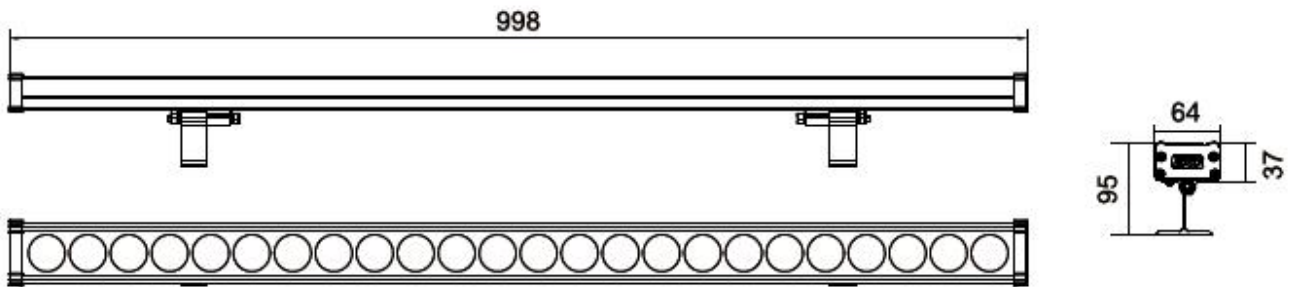


**Installation Diagram**

Step 1: Place the lamp on the carrier to be pre-installed, and determine the lighting requirements. Lock the support screw to the carrier, and lock the mounting screw. Pay attention to the solid installation and adjust the angle of illumination.

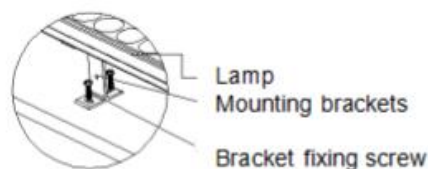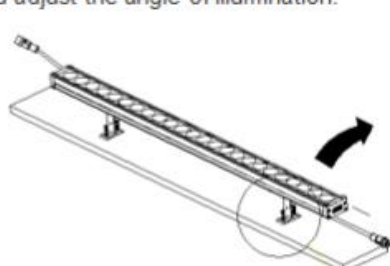


Step 2: According to below picture, connect male and female connector


**System connection diagram:**

- 1、 Host controller should connect with slave controller. Working voltage for controllers are AC220V.
- 2、 On-line main controller should connect with slave controller, on-line main controller and sub controller working voltage are AC220V.
- 3、 each sub-controller with 8 ports, with each port 512 pixels, supporting data converter, supports 100 meters ultra-long haul transmission.
- 4、 The CAT-5 e. cable distance should be within 100 meters between host controller and slave controller, between slave controllers and switch, etc.

**Offline Controlling System Diagram**

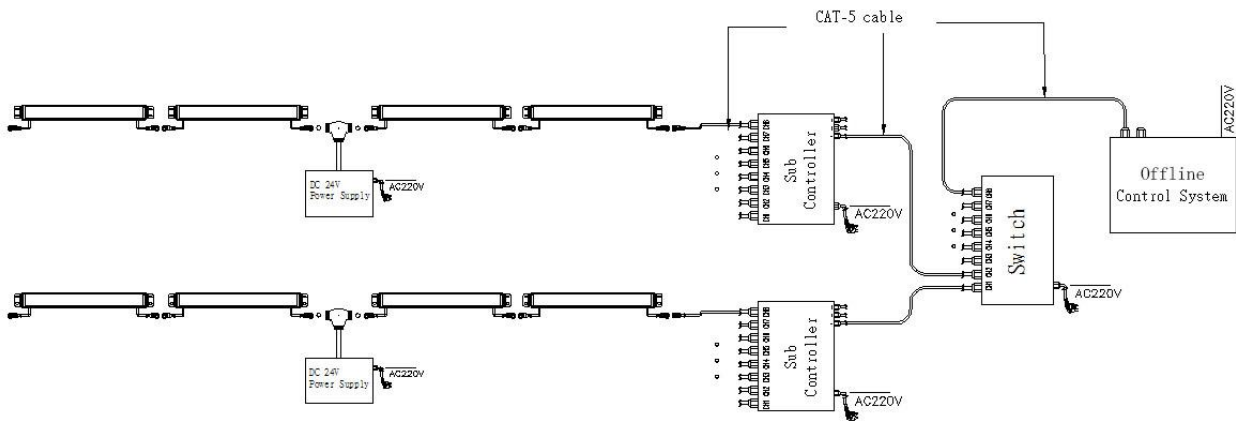


## Online Controlling System Diagram

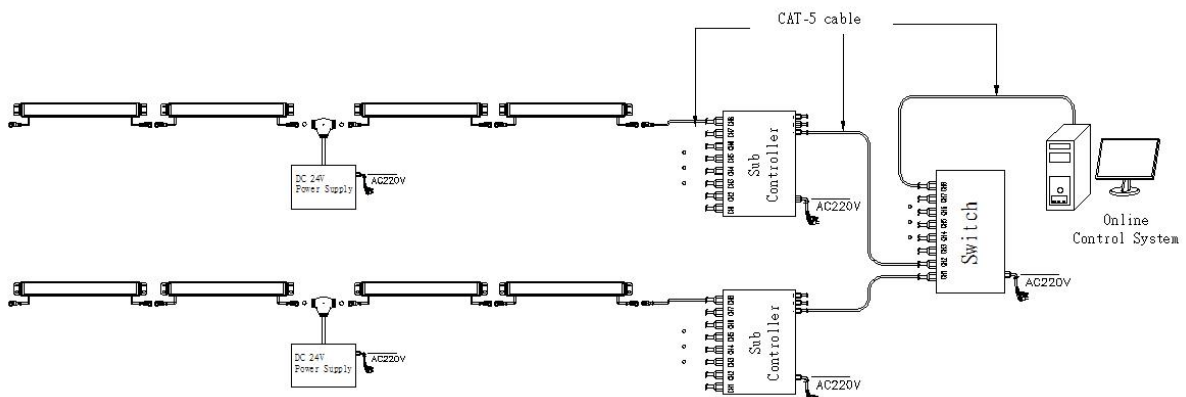


**Accessories :**

**1: Female and Male Connector( Connect to first dot light for signal transmission)**

Female Connector

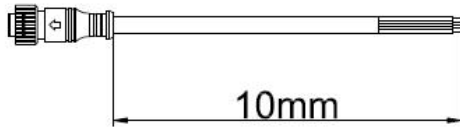


Male Connector

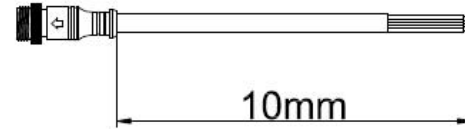

**2: Y Shape Connector(For power Distribution)**


Male Connector

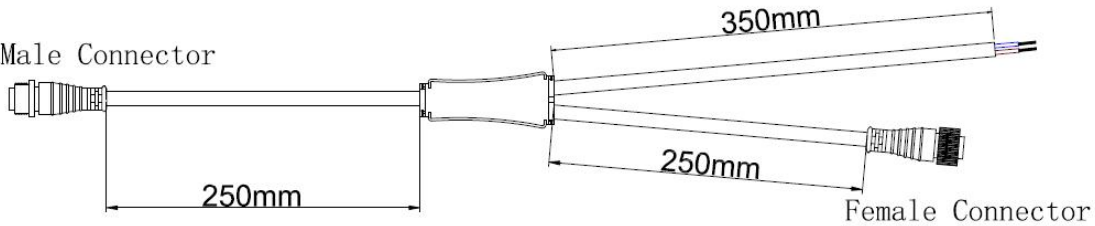


**3: Interconnection Cable(1.3M,3M,5M is standard length)**

Female Connector


Male Connector



**4: End Cap**



Male Connector



Male Connector